Traffic & Pedestrian Management Plan Induction



Mitchell Concrete Plant

Traffic & Pedestrian Management Plan Emergency Site Map





Pedestrians



Designated Walkway Pedestrians MUST give way to vehicles and plant

Pedestrian Exclusion Zone Only authorised pedestrians are permitted to conduct work in operational areas



SPILL KIT

STATION

First Aid

Located in Office & Driver's Room



Emergency Stations



Fire Blanket Located in Driver's Room



Emergency Eye Wash

Located in Driver's Room & **Washout Bays**





Fire Hose Reel

Located on ground level below conveyor



Main Electrical Located in Office



Fire Extinguishers

Are located in each of the following areas: Office, Driver's Room, Pedestrian entrance area, in front of Admix area Batching Area: Ground level, Top of incline conveyor

Traffic & Pedestrian Management Plan Visitor Site Map







Protected Walkway

Designated Walkway
Pedestrians MUST give way
to vehicles and plant

Pedestrian
Only author

Pedestrian Exclusion Zone
Only authorised pedestrians
are permitted to conduct work
in operational areas

Vehicles and Plant



Vehicle Route

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Visitor Parking

1 Parking bay either side of the Pedestrian site entrance gate. Reverse parking only.



2-Way Radio

Upon arrival, visitors must contact the office on the 2 way radio which is located inside the Pedestrian site entrance gate.



- Operate in all areas
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Courier Delivery Site Map

(Light Vehicle)







Protected Walkway



Pedestrians **MUST** give way to vehicles and plant

Pedestrian Exclusion Zone Only authorised pedestrians are permitted to conduct work in operational areas

V

Vehicles and Plant

Vehicle Route

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Courier Parking

1 Parking bay either side of the Pedestrian entrance gate. Reverse parking only.



2-Way Radio

Upon arrival, Couriers must contact the office on the 2 way radio which is located at the Pedestrian site entrance gate.



- Operate in all areas
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Traffic & Pedestrian Management Plan Heavy Vehicle Delivery Site Map (Requiring Forklift)









Protected Walkway

Designated Walkway Pedestrians **MUST** give way to vehicles and plant



Pedestrian Exclusion Zone

Only authorised pedestrians are permitted to conduct work in operational areas

Vehicles and Plant



Vehicle Route

- 1. Forward entry onto the site, drive up onto the ramp.
- 2. Reverse back down the ramp and park in the unloading area
- Drive forward to the entry/exit gate to exit the site.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry

Reverse into the unloading area



Heavy Vehicle Delivery Point



- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Tipper Site Map (Truck & Trailer) Map 1 – Unload Trailer



(Driver must contact office on UHF channel 30 prior to entering site)



Pedestrians



Protected Walkway

Designated WalkwayPedestrians **MUST** give way to vehicles and plant




Pedestrian Exclusion ZoneOnly authorised pedestrians

Only authorised pedestrians are permitted to conduct work in operational areas

Vehicles and Plant



Vehicle Route for Tipper Truck & Trailer (Map 1 - Unload Trailer)



- Reverse back up the ramp to the material bins and unload your trailer into the respective bin.
- 3. Drive forward towards the entry/exit gate.
- 4. Reverse back under the Silos to the trailer parking area and unhook the trailer.

Once the trailer has been unloaded and unhooked, refer to Map 2 for directions to unload the truck.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry



Tipper Discharge Location

Trailer Parking

Trailer Parking area



- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Tipper Site Map (Truck & Trailer) Map 2 – Unload Truck



(Driver must contact office on UHF channel 30 prior to entering site)



Pedestrians



Protected Walkway

Designated Walkway
Pedestrians MUST give way
to vehicles and plant



Pedestrian Exclusion Zone Only authorised pedestrians are permitted to conduct work in operational areas

Vehicles and Plant



Vehicle Route for Tipper Truck & Trailer (Map 2 - Unload Truck)

- 5. Drive forward towards the entry/exit gate.
- 6. Reverse back up the ramp to unload in the material bins.
- 7. Drive forward towards the entry/exit gate.
- 8. Reverse back towards the Silos to the trailer parking area and hook-up the trailer
- 9. Drive forward to the entry/exit gate to exit the site.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry



Tipper Discharge Location

Trailer Parking

Trailer Parking area



- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Tipper Site Map (Truck only)








Pedestrians

Protected Walkway

Designated Walkway Pedestrians MUST give way to vehicles and plant

Pedestrian Exclusion Zone Only authorised pedestrians are permitted to conduct work in operational areas



- Forward entry onto the site, drive forward towards the Silos.
- Reverse back towards the entry/exit gate.
- Drive forward onto the Material bins ramp. Reverse back under the Silos to discharge
- Drive forward to the entry/exit gate to exit the site.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.

Vehicles and Plant



Reverse Entry





Front End Loader (FEL) and Forklift

Tipper Discharge Location

- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres




Powder Tanker Site Map (B-Doubles)



(Driver must contact office on UHF channel 30 prior to entering site)



Pedestrians



Designated Walkway
Pedestrians MUST give way
to vehicles and plant



Pedestrian Exclusion Zone
Only authorised pedestrians
are permitted to conduct work
in operational areas

Vehicles and Plant



Vehicle Route for B-Doubles

- 1. Forward entry onto the site, drive up the ramp towards the top left hand corner of the bins.
- Reverse down the ramp and back towards the Sand bin (bottom right hand corner).
- 3. Drive forward towards the entry/exit gate.
- 4. Reverse across the site and under the Silo to discharge.
- 5. Drive forward to the entry/exit gate to exit the site

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry



Powder Tanker Discharge Location



- Operate in all areas
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Powder Tanker Site Map (Tankers)







Pedestrians



Protected Walkway

Designated WalkwayPedestrians **MUST** give way to vehicles and plant



Pedestrian Exclusion Zone
Only authorised pedestrians
are permitted to conduct work
in operational areas

Vehicles and Plant



Vehicle Route for Tankers

- 1. Forward entry onto the site, drive up the ramp towards the top of the bins.
- 2. Reverse back down the ramp and under the Silo to discharge
- Drive forward to the entry/exit gate to exit the site.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry



Powder Tanker Discharge Location




- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Admix Bulk Tanker Site Map





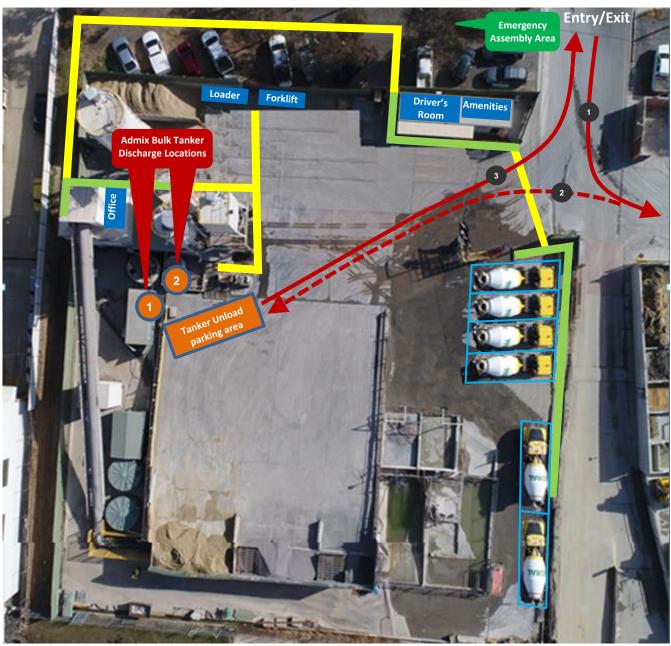

Pedestrians

Protected Walkway



Designated Walkway Pedestrians **MUST** give way to vehicles and plant



Pedestrian Exclusion Zone

Only authorised pedestrians are permitted to conduct work in operational areas



- Reverse back to the Tanker discharge locations to unload. Drive forward to the entry/exit gate to exit the site.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry

Reverse into the Tanker Unload Parking area



Admix Bulk Tanker Discharge Locations



Tanker Unload Parking area


Driver must park in Unloading area while discharging




- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Traffic & Pedestrian Management Plan Agitator Site Map



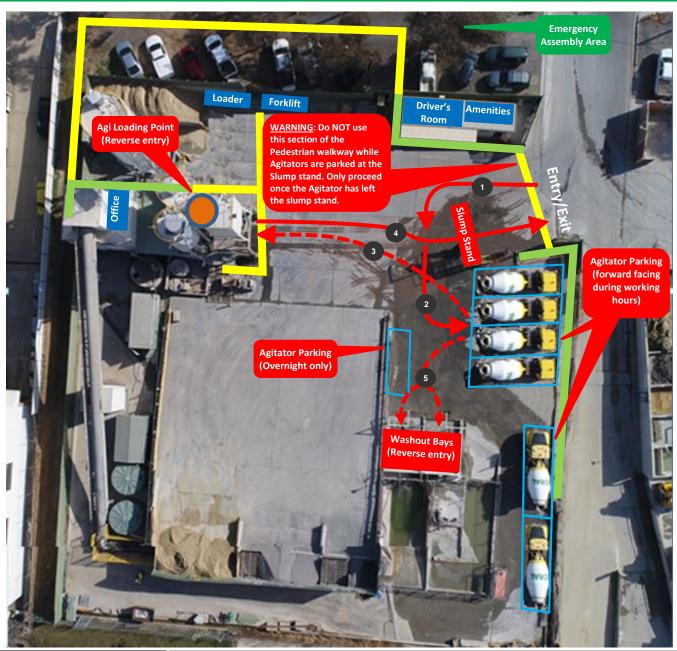

Pedestrians




Designated Walkway Pedestrians **MUST** give way

to vehicles and plant

Pedestrian Exclusion Zone

Only authorised pedestrians are permitted to conduct work in operational areas

Vehicles and Plant



- 1. Forward entry onto the site.
- Forward entry into parking bays.
- Reverse from parking bays into the Loading bay.
- 4. Drive forward to the Slump Stand, and then continue forward to exit the site.
- 5. At end of day, reverse from parking bay to the Washout bays and then return vehicle to the parking bay.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse entry

Reverse entry into the Loading area and Washout Bays.



Agitator Loading Point



Parking is forward facing during working hours and rear facing when rostered off.



- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Loading Washout Waste Site Map







Pedestrians

Protected Walkway

Designated WalkwayPedestrians **MUST** give way to vehicles and plant

Т

Pedestrian Exclusion Zone
Only authorised pedestrians
are permitted to conduct work
in operational areas

Vehicles and Plant



Vehicle Route

- Forward entry onto the site, drive up the ramp towards the top right hand corner of the bins, loop around and drive down the ramp towards the front fence line.
- Reverse back up the ramp towards the material bins.
- 3. Drive forward towards the entry/exit gate.
- 4. Reverse back across the site to the Loading area.
- 5. Drive forward to the entry/exit gate to exit the site.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry



Washout Waste Loading Location



- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres

Loading Hard Waste Site Map







Pedestrians

Protected Walkway



Designated Walkway

Pedestrians **MUST** give way to vehicles and plant



Pedestrian Exclusion Zone
Only authorised pedestrians
are permitted to conduct work
in operational areas

Vehicles and Plant



Vehicle Route

- Forward entry onto the site, drive up the ramp towards the top right hand corner of the bins, loop around and drive down the ramp towards the front fence line.
- 2. Reverse back up the ramp towards the material bins.
- 3. Drive forward towards the entry/exit gate.
- Reverse back across the site to the Loading area.
- 5. Drive forward to the entry/exit gate to exit the site.

Follow the direction of the vehicle route. Drivers MUST not exit their vehicle unless they can access a designated walkway or to complete designated work.



Reverse Entry



Hard Waste Loading Location



- Operate in all areas.
- Have right of way in vehicle operating areas. Always establish positive communication (verbal and/or visual contact) with operator before approaching within 20 metres